

130法兰

伺服电机 (SERVO MOTOR)

产品图



电源电压	法兰	极对数	惯量等级	电机型号	电源电压	功率 kW	额定转速 rpm	额定转矩 N*m	额定电流 A	允许过载倍数
220V	130	5	中惯量	WD130M-10020S-□□□	220V	1	2000	4.8	6	3.5
				WD130M-08515S-□□□	220V	0.85	1500	5.41	4.6	3
				WD130M-15025S-□□□	220V	1.5	2500	5.73	6	3
				WD130M-15020S-□□□	220V	1.5	2000	7.2	8.5	3.5
				WD130M-13015S-□□□	220V	1.3	1500	8.28	7.7	3
				WD130M-20020S-□□□	220V	2	2000	9.55	10	3
				WD130M-26025S-□□□	220V	2.6	2500	9.93	10.5	3
				WD130M-18015S-□□□	220V	1.8	1500	11.46	9.8	3
				WD130M-38025S-□□□	220V	3.8	2500	14.5	16	3
				WD130M-23015S-□□□	220V	2.3	1500	14.64	12.4	3
		高惯量	WD130H-15030S-□□□	220V	1.5	3000	4.8	6	3	
		4	中惯量	WE130M-10025S-□□□	220V	1	2500	4	4	3
				WE130M-13025S-□□□	220V	1.3	2500	5	5	3
				WE130M-15025S-□□□	220V	1.5	2500	6	6	3
				WE130M-20025S-□□□	220V	2	2500	7.7	7.5	2.9
				WE130M-15015S-□□□	220V	1.5	1500	10	6	2.5
				WE130M-26025S-□□□	220V	2.6	2500	10	10	2.5
				WE130M-23015S-□□□	220V	2.3	1500	15	9.5	2
				WE130M-38025S-□□□	220V	3.8	2500	15	13.5	2
380V		5	中惯量	WD130M-08515T-□□□	380V	0.85	1500	5.41	3.1	3
				WD130M-13015T-□□□	380V	1.3	1500	8.28	5.1	3
				WD130M-18015T-□□□	380V	1.8	1500	11.46	6.3	3
				WD130M-23015T-□□□	380V	2.3	1500	14.64	8.5	3
		4		WE130M-20025T-□□□	380V	2	2500	7.7	7.5	2.8
				WE130M-26025T-□□□	380V	2.6	2500	10	10	2.5
				WE130M-38025T-□□□	380V	3.8	2500	15	13.5	2
				WE130M-53030T-□□□	380V	5.3	3000	17	19.5	2
				WE130M-31015T-□□□	380V	3.1	1500	20	11.5	2.5
				WE130M-42020T-□□□	380V	4.2	2000	20	14	2

福建富昌维控电子科技股份有限公司

福州市马尾区江滨东大道58号维控科技园
网站: www.we-con.com.cn

Email: information@we-con.com.cn
电话: 400-799-8189



公众号



抖音号

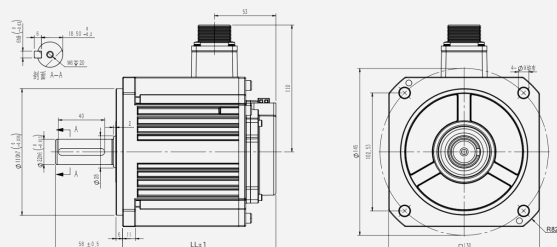
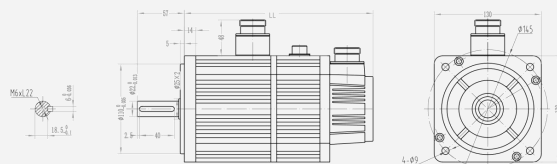


企业微信

WD 系列

The technical drawing illustrates the SMC Model R60-100 Series Air Cylinder. It features three main views: a side elevation, a front view, and a rear view. The side view shows the cylinder's profile with a horizontal stroke dimension 'S' and a vertical height of 110 mm. A mounting bracket is attached to the side, with dimensions for its width (87 mm) and the distance from the cylinder body (L1 ± 0.1 mm). The front view displays the circular cylinder head with four tie rods and a central port. The rear view shows the end flange with four mounting holes, each with a diameter of φ8 H9/f9.

L2 系列

WE 系列

(单位: mm, 误差范围 $\pm 0.5\text{mm}$)



企业微信